

WAYNE PLUS® PRINTER (Olivetti Model PR-4) Ribbon Cartridge Installation Guidelines

Attention: Warranty will be denied or a labor charge applied if these checks are not performed prior to returning printers under warranty.

Correct installation of the print ribbon cartridge is essential to the proper function of your printer.

When installed, the ribbon **MUST** be positioned between the black print head and the thin metal ribbon guide as shown in Figure A. Any other ribbon position will result in damage to the ribbon and poor printing performance.

Before installing the ribbon cartridge, make sure the print head is to the far left (this is done by turning the printer off then on with the cover closed). After installing the ribbon cartridge, turn the green ribbon advance dial clockwise to remove any slack in the ribbon.

CORRECT RIBBON POSITION

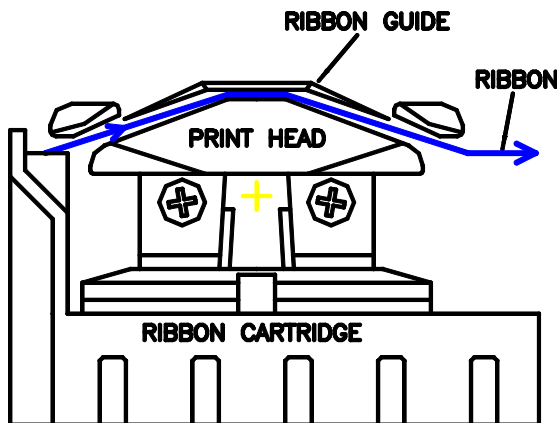


Figure A

INCORRECT RIBBON POSITION

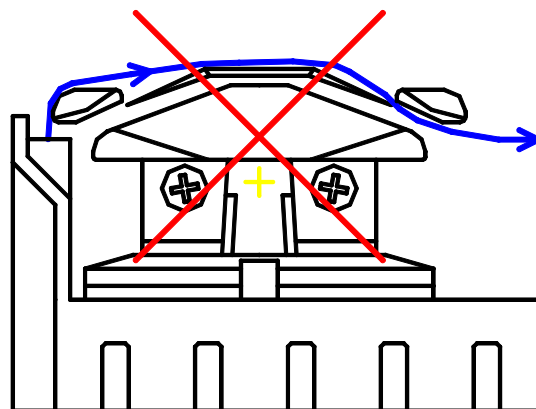


Figure B

Other Helpful Hints.....See reverse side.



PMP CORPORATION
P.O. Box 422 • 25 Security Drive
Avon, CT 06001
Email: sales@pmp-corp.com

Local: 860-677-9656
Toll Free: 800-243-6628
Toll Free Fax: 888-674-0196
Web: www.pmp-corp.com



© PMP CORP.

Other Helpful Hints....

- Use only high quality ribbon cartridges, preferably those made by the OEM.
- Front and rear printer covers must be closed COMPLETELY for proper operation.
- Remove the receipt after each sale to prevent a paper jam.
- Printers gather paper dust and debris through normal use. Continued accumulation will eventually cause erratic operation or prevent operation of the printer. It is important to blow out the dust and debris, especially in the sensor areas. Use canned compressed air (sold at electronics stores such as Radio Shack) each time you change the roll of paper or once a week. Using good quality paper will greatly reduce dust and extend the life of the printer. NEVER USE RECYCLED PAPER!
- Paper jams can be very difficult to clear without causing damage. It is best to avoid them. Never use a screwdriver, knife or the like. Our experience shows that small, delicate parts are damaged or dislodged by use of these improper tools.



PMP CORPORATION
P.O. Box 422 • 25 Security Drive
Avon, CT 06001
Email: sales@pmp-corp.com

Local: 860-677-9656
Toll Free: 800-243-6628
Toll Free Fax: 888-674-0196
Web: www.pmp-corp.com



© PMP CORP.